


# HELLOS

## LED HIGH BAY LIGHT

### MK6 UFO



CE CB RoHS 



Power  
Selected

CCT  
Selected

### Key Features

- ✓ IP65
- ✓ IK10
- ✓ 45°, 60°, 90°, 120° Optical Lens
- ✓ Max Efficiency 210 Lm/W
- ✓ CRI >70 (80)
- ✓ DALI 2.0
- ✓ Wireless Group Control
- ✓ 0~10 V Dimming
- ✓ Hook and Yoke Installation
- ✓ Plug & Play Zhaga Sensor
- ✓ Plug & Play Emergency Kit
- ✓ Zhaga Interface
- ✓ BlueMesh Sensor
- ✓ PC and AL Reflector
- ✓ Tempered Glass Protection
- ✓ Power Selectable
- ✓ Color Temp. Selectable

# MK6 UFO

## ▼ SPECIFICATION SHEET

### ▶ OPTICAL SPECS

Lumen Efficacy	140~210 Lm/w
CCT	4000K, 5000K, 5700K
CRI	>70 (80)

### ▶ ELECTRICAL SPECS

Power	80~200 W
Input Voltage	AC 100~277 Volts
Power Frequency	50/60 Hz
Power Factor	>0.95
Total Harmonic Distortion	<15% (@230V)
Insulation Grade	Class I

### ▶ MECHANICAL SPECS


Color	Black
Lens	PC
Ingress Protection	IP 65
Impact Resistance	IK10
Material	Housing: ADC12 die-cast aluminum Cover: Polycarbonate

### ▶ OTHER DETAILS


Lifespan	≥ 50,000 Hours
Operating Temperature	-30°~50°C
LED Driver Spec	SOSEN, SUNCOM, PHILIPS
LED Spec	SMD 2835
Dimming	DALI,0-10V,PWM, Smart control management system

# MK6 UFO


## ▼ LIGHT DISTRIBUTION CURVE

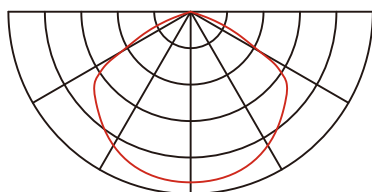


120°

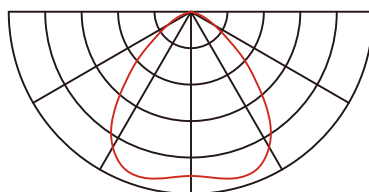

90°

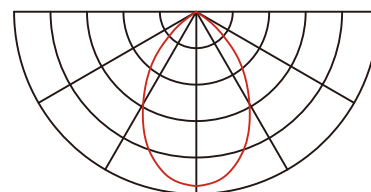

60°

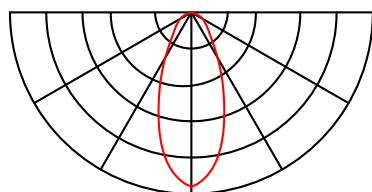


45°

**Remark:**


120°/60°/90° for Both sizes

45° for Dia.300\*H160 mm only


## ▼ DIMENSIONS(MM)

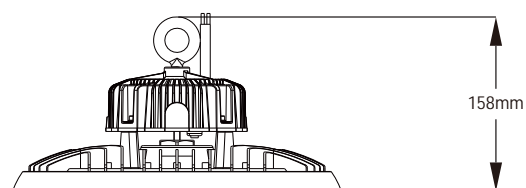


80-100-120W-150w

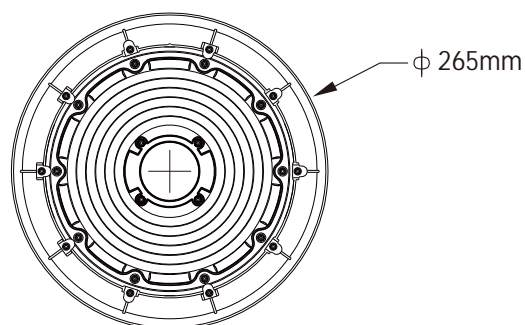

φ 265mm

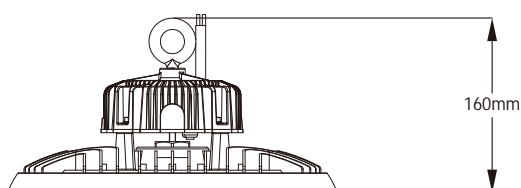

200W

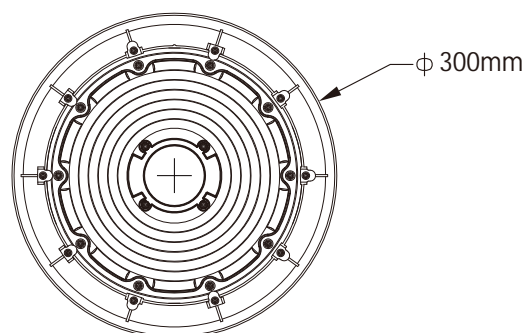

φ 300mm


## ▼ PACKAGE

Dimension(mm)	N.W.(KG)	G.W.(KG)	Package Size(mm)	Shippment Quantity
265*158	2.10	2.60	300*300*150	1995 pcs/20'GP
300*160	2.42	2.97	350*350*160	1428 pcs/20'GP

# MK6 UFO

## ▼ CHARACTERISTICS




 Zhaga

Plug & Play Zhaga Sensor

- Factory Default Setting: Detection area 100%/ Hold time 5s/ Daylight threshold Disable/Stand-by period 0s/Stand-by dimming level 10%.
- Zhaga interface, multiple sensors are optional. Zigbee/Bluetooth/2.4G Group


## ▼ POWER SELECTED

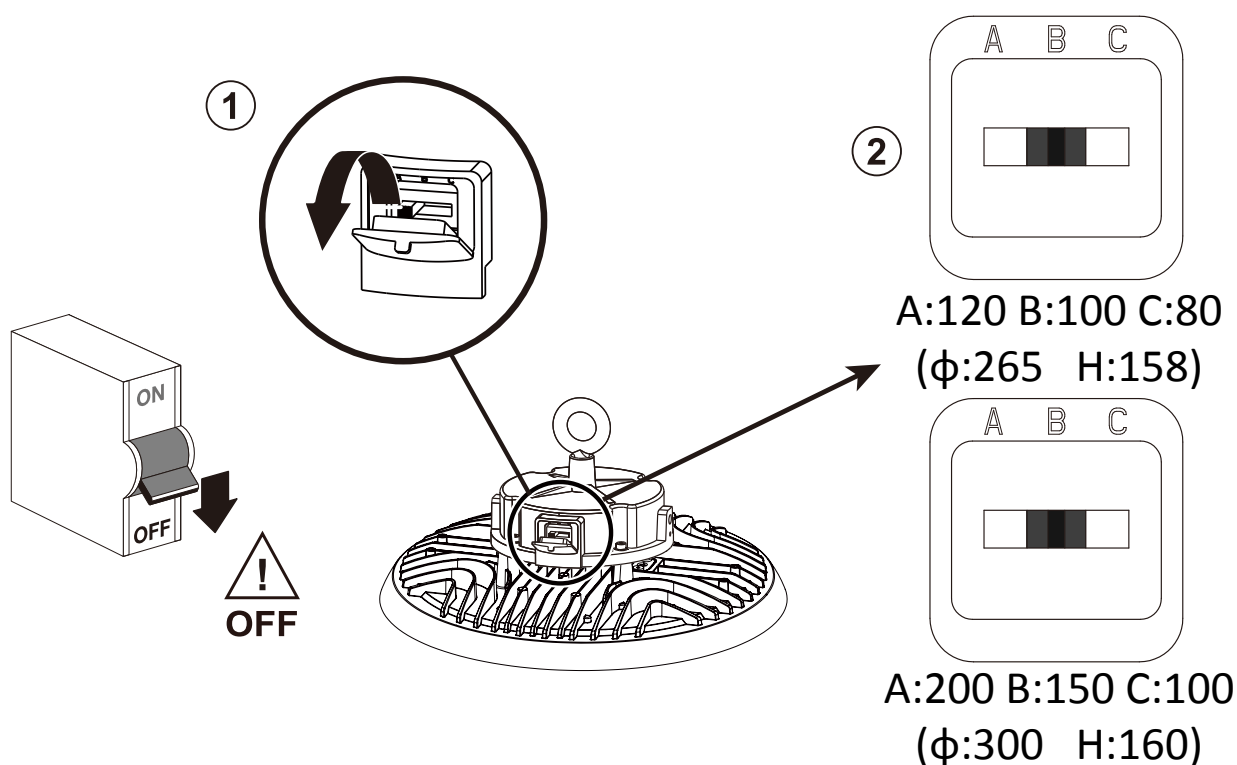

# MK6 UFO

## ▼ CHARACTERISTICS

Blue = Neutral (N)  
Green/Yellow = Earth ( $\oplus$ )  
Brown = Live (L)

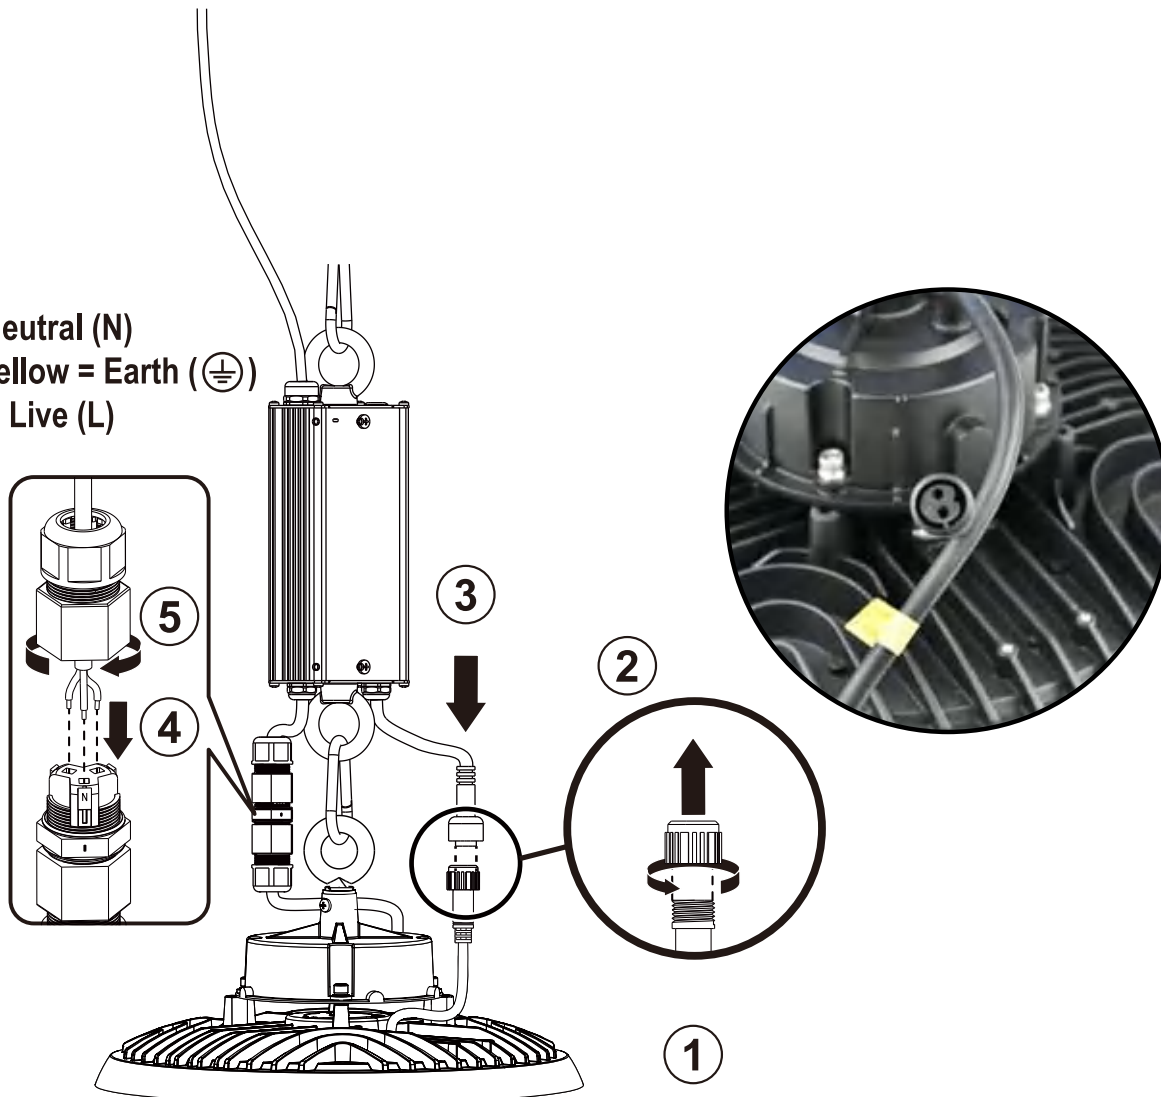

## ▼ EMERGENCY MODULE



Emergency Wattage	8W ,10W
Emergency Onversion Time	<1s
Emergency Operation Time	3.0 or 1.5 Hours
Protection	IP65, Class I,
Ambient Temperature Range	0°C to 50 °C

# MK6 UFO

## ▼ DETAILS



(Safety Ropes)

## ▼ ACCESORIOS

Yoke bracket



+



=



Aluminum reflector



+



=



PC reflector



+



=



Tempered Glass



+




=




# MK6 UFO

## REFLECTOR

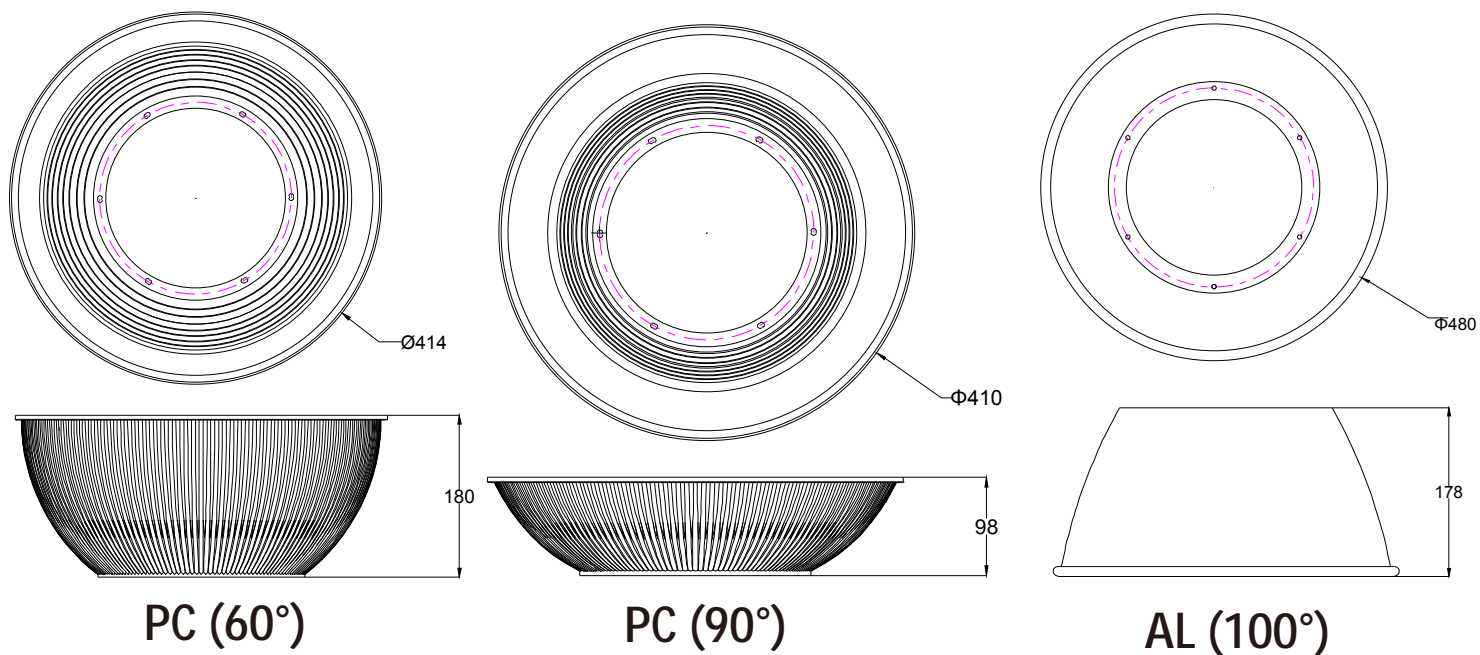

Dia:265mm

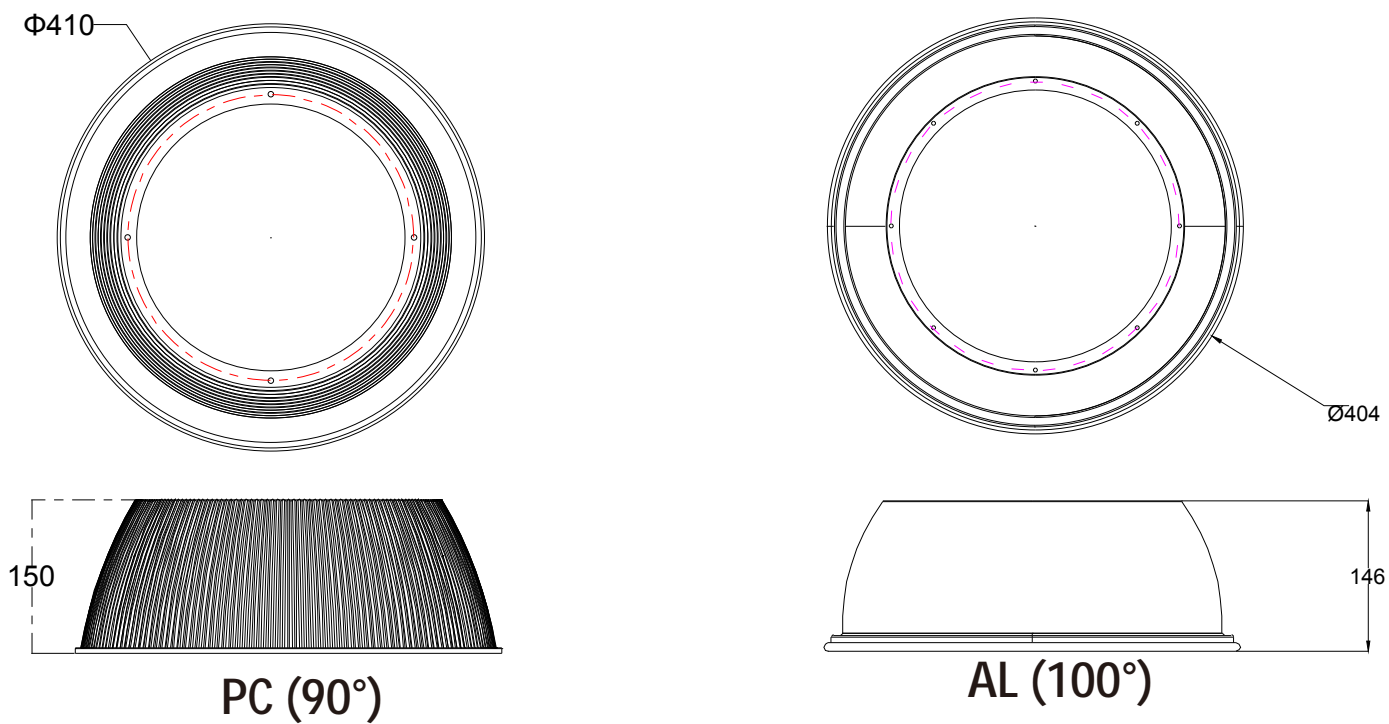

Dia:300mm

# MK6 UFO

## ▼ RELATED PRODUCTS



MK6 UFO



MK5 UFO



MK4 UFO



PYRAMID



INFINITY I



VECTOR I



LINEAR I



LINEAR III

## ▼ APPLICATION



Exhibition hall



Warehouse



Factory

**HELOS** Jiangsu Liangfeng Lighting Co.,Ltd

Add: 111 Gangcheng Ave, Zhangjiagang, Jiangsu, 215600 China

Tel: (86)512-5815 5155

Fax: (86)512-5813 1621

E-mail: peter@helos-lighting.com